


GNS IQ® Quiver

The Integrated Quiver System
for Damaged Fuel



- Enables complete defueling of all inventories including damaged fuel rods
- Fulfills the requirements for dry storage and transportation of the damaged fuel as an entity with the cask
- Routine handling comparable to fuel assemblies

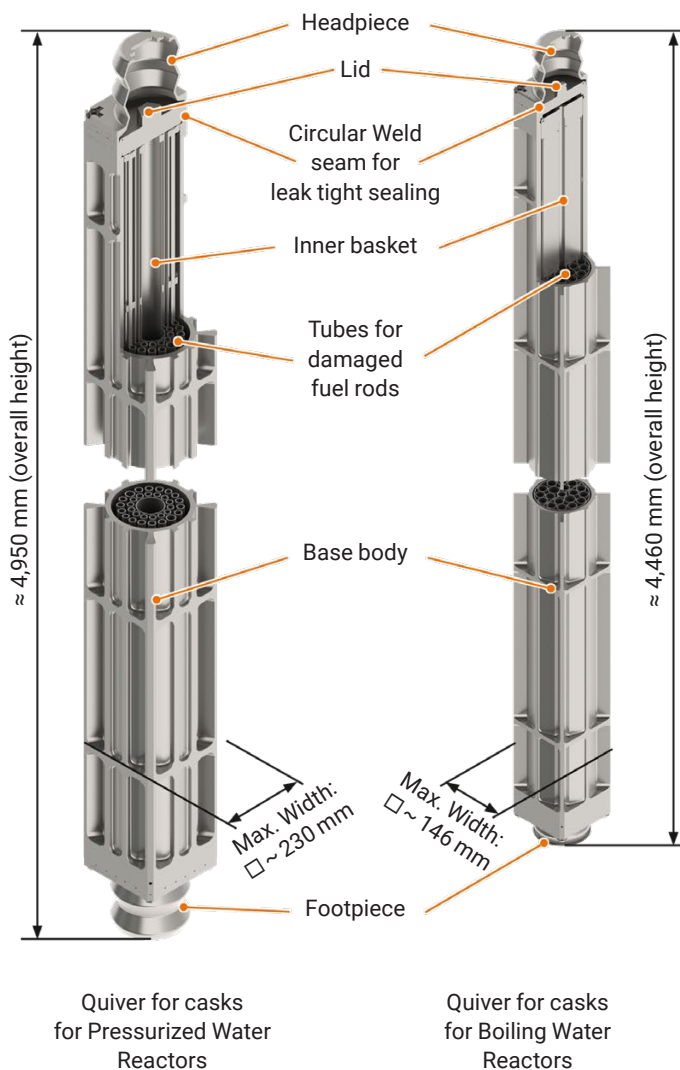

DESCRIPTION

The GNS IQ® Integrated Quiver System is a versatile tool for the disposal of damaged fuel rods from both PWR- and BWR-NPPs. The Quivers can safely accommodate up to 65 fuel rods and – featuring the same dimensions as complete fuel elements – fit into the standard basket positions of the transport and storage casks for PWR-FA and for BWR-FA respectively.

The Quivers are designed like a “second cladding” to accommodate large varieties of fuel rods with defects, e.g. in terms of deformations and defect morphologies, and also leakers. Their robust design provides sufficient margins for safety requirements.

The Quiver consists of:

- a forged stainless steel base body
- an inner basket for the damaged fuel rods, customizable and available in different variants
- a forged lid, bolted and welded to the base body, to provide a leak-tight sealing
- a load attachment point at the top end of the Quiver

HANDLING AND DISPATCH

The dispatch is performed on the reactor floor, which significantly increases process stability.

The dose rate during dispatch is minimized according to the ALARA principle and comparable to the dispatch of transport and storage casks with spent fuel.

All necessary handling and dispatch tools have been manufactured. Several tools have already been tested and approved by German authorities.

Excellence for Nuclear.

GNS Gesellschaft für Nuklear-Service mbH · Frohnhauser Str. 67 · 45127 Essen · Germany
Phone +49 201 109-0 · info@gns.de · www.gns.de

GNS IQ[®] Quiver

The Integrated Quiver System
for Damaged Fuel



LOADING CAPACITY



- Various loading positions with different dimensions (up to 65 fuel rods per Quiver), depending on the individual requirements of the customer
- Uranium or MOX fuel from PWR-NPP and / or BWR-NPP with high enrichments and high burn-ups
- Modular system, customizable to the demands of the customer

LICENSES

The GNS IQ[®] Quiver has the type B(U)F transport license "Quiver in CASTOR[®] V" for PWR-NPPs as well as for BWR-NPPs.

REFERENCES

Using these GNS fuel rod quivers, the German PWR plants in Biblis, Grafenrheinfeld and Unterweser as well as the BWR plants in Krümmel and Phillipsburg have already been completely defueled. A total of 32 quivers has been dispatched at these sites by the GNS teams and is now stored in CASTOR[®] casks in the on-site interim storage facilities.

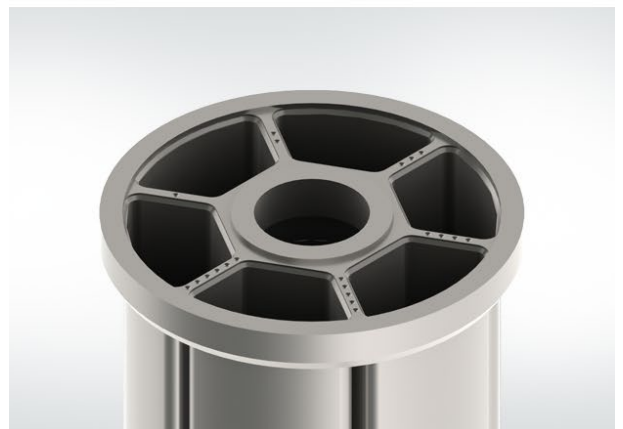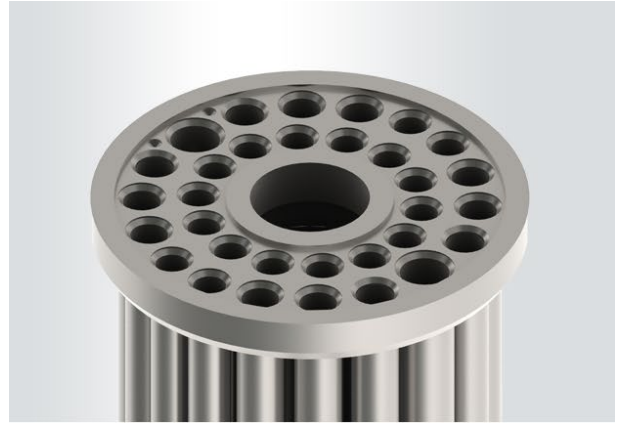

Excellence for Nuclear.

GNS Gesellschaft für Nuklear-Service mbH · Frohnhauser Str. 67 · 45127 Essen · Germany
Phone +49 201 109-0 · info@gns.de · www.gns.de